

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 803 340 A3

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
19.11.1997 Bulletin 1997/47

(51) Int. Cl.⁶: B29C 47/88

(43) Date of publication A2:
29.10.1997 Bulletin 1997/44

(21) Application number: 96308240.9

(22) Date of filing: 14.11.1996

(84) Designated Contracting States:
AT BE CH DE ES FR GB IT LI NL SE

(30) Priority: 14.11.1995 JP 295649/95

(71) Applicant:
IDEMITSU PETROCHEMICAL CO., LTD.
Minato-ku, Tokyo (JP)

(72) Inventors:
• Fujii, Atsushi,
Idemitsu Petrochem. Co., Ltd.
Himeji-shi, Hyogo-ken (JP)
• Funaki, Akira,
Idemitsu Petrochem. Co., Ltd.
Himeji-shi, Hyogo-ken (JP)


• Yukumoto, Tohru,
Idemitsu Petrochem. Co., Ltd.
Himeji-shi, Hyogo-ken (JP)
• Uchiyama, Katsumi,
Idemitsu Petrochem. Co., Ltd.
Himeji-shi, Hyogo-ken (JP)

(74) Representative:
Jackson, Peter Arthur
GILL JENNINGS & EVERY
Broadgate House
7 Eldon Street
London EC2M 7LH (GB)

(54) **Producing method of a thermoplastic resin sheet and producing apparatus thereof**

(57) A producing apparatus is used, in which a metallic endless belt (15) having a mirror face is provided to be wound on and between a first cooling roller (13), covered with an elastic member, and a second cooling roller (14), and a third cooling roller (16), having a mirror face on its surface and touching the first cooling roller (13) through a molten thermoplastic resin sheet (11) and the endless belt (15), is provided to hold the molten thermoplastic resin sheet (11) pressed with the endless belt (15). While the temperature of the third cooling roller (16) and the endless belt (15) directly touching the molten thermoplastic resin sheet is retained to be less than 50 °C and more than zero, the molten thermoplastic resin sheet (11) is guided into the area between the first (13) and third cooling rollers (16) to touch the endless belt (11), touching the first cooling roller (13), and the third cooling roller (14) at approximately the same time, and the molten thermoplastic resin sheet (11) is touch-rolled on the face and cooled by the first (13) and third cooling rollers (16) during the elastic deformation of the elastic member, caused by a pressing force between the first (13) and third cooling rollers (16), and subsequently, the molten thermoplastic resin sheet (11) is cooled by touch-rolling the face to the third cooling roller (16) with the endless belt (15).

FIG. 1

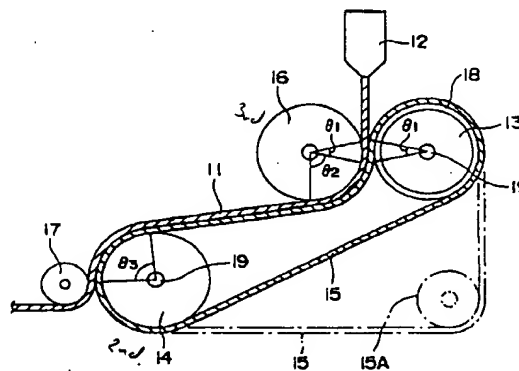



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 30 8240

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
P,X	EP 0 687 545 A (IPEC CO LTD) 20 December 1995 * abstract * * column 2, line 51 - column 3, line 18 * * column 4, line 1 - line 5 * * column 4, line 38 - column 5, line 29 * * column 5, line 57 - column 6, line 29 * * column 6, line 48 - column 7, line 8 * * claims 1-5,7,8; figure 1 *	1,2,8,9	B29C47/88
Y	---	3-7, 10-15	
D,X	DATABASE WPI Section Ch, Week 9429 Derwent Publications Ltd., London, GB; Class A32, AN 94-238143 XP002040629 & JP 06 170 919 A (IPEC KK) , 21 June 1994 * abstract *	1,2,8,9	
Y	PATENT ABSTRACTS OF JAPAN vol. 012, no. 169 (M-699), 20 May 1988 & JP 62 284719 A (TOPPAN PRINTING CO LTD), 10 December 1987, * abstract *	3-7, 10-15	TECHNICAL FIELDS SEARCHED (Int.Cl.6) B29C
P,X	DATABASE WPI Section Ch, Week 9634 Derwent Publications Ltd., London, GB; Class A32, AN 96-337892 XP002040635 & JP 08 156 073 A (PLACO KK) , 18 June 1996 * abstract *	1,2,8,9	

-/-			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 12 September 1997	Examiner Jensen, K
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01.82 (P04C01)




European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 30 8240

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	DATABASE WPI Section Ch, Week 9538 Derwent Publications Ltd., London, GB; Class A32, AN 95-288997 XP002040636 & JP 07 186 244 A (IPEC KK) , 25 July 1995 * abstract *	1-15	
A	EP 0 614 748 A (IDEMITSU PETROCHEMICAL CO) 14 September 1994 * abstract * * table 2 *	1-3,7,8	
A	EP 0 496 260 A (IDEMITSU PETROCHEMICAL CO) 29 July 1992 * abstract * * page 5, line 10 - line 53 * * claims 1,2,7; figure 1; table 1 *	1-3,7,8	
A	US 3 988 098 A (KATO TETSUJI ET AL) 26 October 1976 * abstract * * figure 32 *	3-7, 10-15	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
Place of search THE HAGUE		Date of completion of the search 12 September 1997	Examiner Jensen, K
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.92 (P04C01)



Europäisches Patentamt

(19)

European Patent Office

Office européen des brevets



(11)

EP 0 803 340 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

29.10.1997 Bulletin 1997/44

(51) Int. Cl.⁶: B29C 47/88

(21) Application number: 96308240.9

(22) Date of filing: 14.11.1996

(84) Designated Contracting States:

AT BE CH DE ES FR GB IT LI NL SE

(30) Priority: 14.11.1995 JP 295649/95

(71) Applicant:

IDEMITSU PETROCHEMICAL CO., LTD.
Minato-ku, Tokyo (JP)

(72) Inventors:

- Fujii, Atsushi,
Idemitsu Petrochem. Co., Ltd.
Himeji-shi, Hyogo-ken (JP)

- Funaki, Akira,
Idemitsu Petrochem. Co., Ltd.
Himeji-shi, Hyogo-ken (JP)
- Yukumoto, Tohru,
Idemitsu Petrochem. Co., Ltd.
Himeji-shi, Hyogo-ken (JP)
- Uchiyama, Katsumi,
Idemitsu Petrochem. Co., Ltd.
Himeji-shi, Hyogo-ken (JP)

(74) Representative: Jackson, Peter Arthur
GILL JENNINGS & EVERY
Broadgate House
7 Eldon Street
London EC2M 7LH (GB)

(54) Producing method of a thermoplastic resin sheet and producing apparatus thereof

(57) A producing apparatus is used, in which a metallic endless belt having a mirror face is provided to be wound on and between a first cooling roller, covered with an elastic member, and a second cooling roller, and a third cooling roller, having a mirror face on its surface and touching the first cooling roller through a molten thermoplastic resin sheet and the endless belt, is provided to hold the molten thermoplastic resin sheet pressed with the endless belt. While the temperature of the third cooling roller and the endless belt directly touching the molten thermoplastic resin sheet is retained to be less than 50 °C and more than zero, the molten thermoplastic resin sheet is guided into the area between the first and third cooling rollers to touch the endless belt, touching the first cooling roller, and the third cooling roller at approximately the same time, and the molten thermoplastic resin sheet is touch-rolled on the face and cooled by the first and third cooling rollers during the elastic deformation of the elastic member, caused by a pressing force between the first and third cooling rollers, and subsequently, the molten thermoplastic resin sheet is cooled by touch-rolling the face to the third cooling roller with the endless belt.

EP 0 803 340 A2

Description

This invention relates to a producing method and a producing apparatus of a thermoplastic resin sheet, in which the obtained polypropylene resin sheet or film can be used for the packaging of food, medicine and so on.

Of late years, as a transparentizing art of sheet (or film) made out of polypropylene resin, various processes with the use of a metallic endless belt have been proposed.

The greatest advantage of the use of the metallic endless belt is the point that high-glossing of both faces of the sheet can be effectively obtained to continuously transfer a mirror face of the metallic endless belt onto the surface of the sheet.

In order to increase the transparency of the polypropylene resin sheet, however, in addition to the aforementioned high-glossing, it is required that haze (the degree of cloud) inside the sheet is reduced to a low level.

Conventionally, various methods and apparatus for improving the transparency have been proposed.

For example, according to Japanese Patent Application Laid-open No. 6-170919, an apparatus for cooling and caking a fused sheet is disclosed, in which the metallic endless belt is provided to be wound on and between a metal roller and an elastic roller, covered with an elastic body on its surface, and after the sheet is guided into the area between the elastic roller and the cooling roller through the metallic endless belt, the sheet is, continuously, cooled while being pressed to a part of the circumference of the cooling roller.

In this case of the apparatus, the effect of immediately cooling the sheet pressed by the cooling roller and the metallic endless belt is insufficient, and in addition, hardness of the elastic body of the elastic roller is higher, so that the sheet is not touch-rolled on its face, with the result that a resin bank is produced or a fine transparency of the sheet cannot be obtained.

In Japanese Patent Application Laid-open No. 6-166089 and Japanese Patent Application Laid-open No. 6-170919, a method for cooling the sheet using the same method after the metallic endless belt is provided to be wound on and between the metal roller and the elastic roller covered with the elastic body on its surface is disclosed, however, the cooling temperature is higher and hardness of the elastic body is higher, so that the immediate cooling effect is insufficient, with the result that the transparent polypropylene sheet cannot be obtained without the use of raw materials consisting of a nucleating agent.

Further, according to Japanese Patent Application Laid-open No. 6-55613, a producing method of a thermoplastic resin sheet is disclosed, in which the sheet of the fusing state, consisting of a nucleating agent or the like, is guided into an area between the cooling roller and the metallic endless belt, and after the sheet is moved while being touched to the cooling roller and the metallic endless belt, the sheet is pressed against the cooling roller from the inside of the metallic endless belt by the aforementioned cooling roller.

In this case of the producing method, the immediate cooling of the sheet starts after the sheet is sandwiched between the cooling roller and the metallic endless belt, so that at the starting point of the immediate cooling, the face pressure is insufficient, with the result that it is difficult to obtain a fine effect of the immediate cooling and a fine surface gloss on the sheet. As a result, the transparency has tried to be improved by adding a nucleating agent or the like, but the degree of transparency may be insufficient if the nucleating agent or the like is not added.

A first invention in the present invention is a producing method of a thermoplastic resin sheet, using a producing apparatus in which a metallic endless belt having a mirror face on the surface is provided to be wound on and between a first cooling roller, covered with an elastic member on the surface, and a second cooling roller, and a third cooling roller, having a mirror face on the surface and touching the first cooling roller through a molten thermoplastic resin sheet and the metallic endless belt, is provided to hold the molten thermoplastic resin sheet pressed with the metallic endless belt, which is characterized by guiding the molten thermoplastic resin sheet into the area between the first and third cooling rollers to touch the metallic endless belt, touching the first cooling roller, and the third cooling roller at approximately the same time, while the temperature of the metallic endless belt, directly touching the molten thermoplastic resin sheet, and the third cooling roller is retained to be less than 50 °C and more than zero; touch-rolling the face and cooling the molten thermoplastic resin sheet by the first and third cooling rollers while the elastic member is elastically deformed by a pressing force between the first and third cooling rollers; and cooling, subsequently, the molten thermoplastic resin sheet by touch-rolling the molten thermoplastic resin sheet on the face against the third cooling roller by the metallic endless belt to cool.

The aforementioned molten thermoplastic resin sheet is a thermoplastic resin sheet just after being formed by being extruded from an extruder.

The molten thermoplastic resin sheet in the present invention should be recognized as to also mean a film-state molten thermoplastic resin, too.

As the preferable thermoplastic resin, polyethylene, polypropylene, polyvinyl, chloride, polyvinyl, alcohol, polyethylene terephthalate, polyarylate, polyethylene-2,6 naphthalate, polyethylene- α , β , bis (2-chlorophenoxyethane-4, 4'-dicarboxylate), polyphenylene oxide, polyester, polyphenylene sulfide, polyether ether ketone, aromatic polyamide, polyarylate, polyimide, polyamide imide, polyether imide, syndiotactic polystyrene, biphenylether ketone, or the like can be used.

The recommended thermoplastic resin is a polypropylene resin.

As the aforementioned polypropylene resin, a homopolymer of polypropylene, a copolymer (random, block) with ethylene, a composition thereof or the like can be used. A random copolymer with ethylene is especially outstanding in the transparency. Incidentally, in the resin, a nucleating agent, it may consist of a sorbitol type, benzoic aluminium type, sodium type or the like.

And the sheet may be a single layer of thermoplastic resin or multi-layers including a layer of thermoplastic resin.

In the present invention, when the temperature of the metallic endless belt and the roller in order to cool the molten thermoplastic resin sheet exceeds 50 °C, a fine transparency cannot be obtained. More preferably, it is less than 30 °C. Further, when it is lower than zero, a water-droplet spot is produced on the sheet.

By guiding the molten thermoplastic resin sheet into the area between the first and third cooling rollers to touch the metallic endless belt, touching the first cooling roller, and the third cooling roller at approximately the same time, the molten thermoplastic resin sheet can be touch-rolled and cooled at the same time, resulting in the improved transparency of the thermoplastic resin sheet. It can be assumed, when the molten thermoplastic resin sheet is touched earlier to either the metallic endless belt or the cooling roller, before the mirror face is transferred onto both faces of the sheet, the cooling and caking of the molten thermoplastic resin sheet is advanced.

In the present invention, it is advisable that the degree of the surface roughness of the mirror face of the metallic endless belt and the roller is less than 0.5 S.

As for the material of the endless belt, stainless, carbon steel, titanium alloy or the like can be used. The thickness of the endless belt is selective, more preferably more than 0.3 mm from view of strength.

As for the material of the aforementioned elastic member, fluorine-type rubber, silicone-type rubber, EPDM or the like can be used. It is advisable that the thickness of the elastic member is more than 3 mm in order to obtain fine face pressure with the elastic deformation.

In the present invention, the aforementioned molten thermoplastic resin sheet is touch-rolled on its face and cooled with the elastic deformation of the aforementioned elastic member, resulting in the improved efficiency of the transfer of the mirror face and the cooling.

A second invention in the present invention is a producing method of the thermoplastic resin sheet, using a producing apparatus in which a first metallic endless belt, having a mirror face, wound on and between a first cooling roller, covered with an elastic member on the surface, and a second cooling roller and a second metallic endless belt, having a mirror face, wound on and between a third cooling roller and a fourth cooling roller are provided to run along side each other to sandwich a molten thermoplastic resin sheet, and an added-pressure means for both metallic endless belts is provided in a section where both metallic endless belts run along side each other to sandwich the molten thermoplastic resin sheet, which is characterized by guiding the molten thermoplastic resin sheet into the area between the first and second metallic endless belts to touch the first endless belt, touching the first cooling roller, and the second metallic endless belt, touching the third cooling roller, at approximately the same time while the temperature of the metallic endless belt directly touching the molten thermoplastic resin sheet is retained to be less than 50 °C and more than zero; touch-rolling the face and cooling the molten thermoplastic resin sheet by the first and third cooling rollers while the elastic member is elastically deformed by a pressing force between the first and third cooling rollers; and cooling, subsequently, the molten thermoplastic resin sheet by touch-rolling the formed molten thermoplastic resin sheet on the face by the added-pressure means in a section where both metallic endless belts run along side each other.

In the second invention, the third cooling roller may be covered with the elastic member on the surface of the third cooling roller.

That is to say, the first and third cooling rollers of the invention are covered with the elastic member on both surfaces.

In the second invention, the added-pressure means for both metallic endless belts can be at least a pair of rollers located to sandwich both metallic endless belts.

The number of pairs of rollers can be decided based on the length between the first and second rollers and between the third and fourth rollers.

The aforementioned pair of rollers may be located at a position to be opposed to each other by sandwiching both metallic endless belts or may be located at a position to be away from each other not to oppose to each other by sandwiching both metallic endless belts.

In the second invention, the added-pressure means for both metallic endless belts may be a roller located to cause both metallic endless belts to curve between the first and second rollers or between the third and fourth rollers.

Both metallic endless belts are selectively located to curve between the first and second rollers or between the third and fourth rollers, and in either case, the same effect of the added-pressure can be obtained.

In the first invention or the second invention, it is advisable that when the molten thermoplastic resin sheet is touch-rolled on the face with the elastic deformation of the elastic member, the face pressure is defined as 0.1 MPa-20.0 MPa; and when the molten thermoplastic resin sheet is touch-rolled on the face without the elastic deformation of the elastic member, the face pressure is defined as 0.01 MPa-0.5 MPa.

When the face pressure is lower than 0.1 MPa or 0.01 MPa described above, the efficiency of transfer of the mirror

face and the cooling become reduced. When the face pressure is higher than 20.0 MPa or 0.5 MPa described above, tension of the belt is higher, so that it is not preferable from the view of the life of the belt.

A producing apparatus of a thermoplastic resin sheet, relating to a third invention in the present invention, is characterized by providing a metallic endless belt having a mirror face, which is wound on and between a first cooling roller, covered with an elastic member on the surface of the metallic endless belt, and a second cooling roller; and a third cooling roller having a mirror face and touching the first cooling roller through a molten thermoplastic resin sheet and the metallic endless belt, which is provided to hold the molten thermoplastic resin sheet pressed by the metallic endless belt.

That is to say, the invention is the producing apparatus used in order to carry out the producing method of the first invention.

A producing apparatus of a thermoplastic resin sheet, relating to a fourth invention in the present invention, is characterized by providing a first metallic endless belt having a mirror face, which is wound on and between a first cooling roller covered with an elastic member on the surface of the first metallic endless belt; a second metallic endless belt having a mirror face, which is wound on and between a third cooling roller and a fourth cooling roller, in which the first metallic endless belt and the second metallic endless belt are provided to run along side each other to sandwich a molten thermoplastic resin sheet; and an added-pressure means for adding pressure to both metallic endless belts in a section where both metallic endless belts run along side each other to sandwich the molten thermoplastic resin sheet.

That is to say, the invention is the producing apparatus in order to carry out the producing method of the second invention.

In the fourth invention, the third cooling roller can be covered with the elastic member on the surface of the third cooling roller.

In the fourth invention, the added-pressure means for adding pressure to both metallic endless belts can be at least a pair of rollers located to a sandwich both metallic endless belts.

In the fourth invention, the added-pressure means for adding pressure to both metallic endless belts can be a roller located to cause both metallic endless belts to curve between the first and second rollers or between the third and fourth rollers.

In the third invention or the fourth invention, it is advisable that the elastic member is less than 95 degrees, preferably 60 degrees of the hardness (reference to a type of JIS K6301 A).

When the hardness is more than 95 degrees, the elastic force is smaller, so that a resin bank is easily produced when the molten thermoplastic resin sheet is touched either by both the cooling roller and the metallic endless belt or by both of the metallic endless belts at approximately the same time.

In the accompanying drawings:

Fig. 1 is a diagrammatic view of a producing apparatus used in a producing method of a thermoplastic resin sheet according to a first embodiment of the present invention;

Fig. 2 is a diagrammatic view of a producing apparatus used in a producing method of a thermoplastic resin sheet according to a second embodiment of the present invention;

Fig. 3 is a diagrammatic view of a producing apparatus used in a producing method of a thermoplastic resin sheet according to a third embodiment of the present invention;

Fig. 4 is a diagrammatic view of a producing apparatus used in a producing method of a thermoplastic resin sheet according to a fourth embodiment of the present invention; and

Fig. 5 is a diagrammatic view of a producing apparatus used in a producing method of a thermoplastic resin sheet according to a fifth embodiment of the present invention.

[FIRST EMBODIMENT]

A method and an apparatus for producing a thermoplastic resin sheet 11 according to the present invention will be explained with reference to Fig. 1. In the following description of the present invention, a polypropylene resin is used as a preferable thermoplastic resin.

First of all, a structure of the apparatus for producing the polypropylene resin sheet 11 of the embodiment will be explained.

The producing apparatus is composed of a T-die 12 of an extruder, a metallic endless belt 15 wound on and between a first cooling roller 13 and a second cooling roller 14, a third cooling roller 16 connecting with the first cooling roller 13 through the polypropylene resin sheet 11 and the metallic endless belt 15, and a fourth roller 17 located adjacent to the second cooling roller 14.

Incidentally, as illustrated with a chain line in Fig. 1, the endless belt 15 may be further cooled to be touched with an additional cooling roller 15A, located in front of the first roller 13, from the inside face of the endless belt 15.

The aforementioned first cooling roller 13 is covered with an elastic member 18, such as fluorine-type rubber or the like, on its surface. The elastic member 18 is less than 95 degrees, preferably 60 degrees of the hardness (reference to

a type of JIS K6301 A) and more than 3 mm in thickness.

The metallic endless belt 15 is made of stainless steel or the like, having a mirror face of less than 0.5 S of the surface roughness.

A rotating shaft 19 of at least one of the first and second cooling rollers 13 and 14 is coupled with a rotation driving means (not shown).

The aforementioned third cooling roller 16 also has a mirror face of less than 0.5 S of the surface roughness. The third cooling roller 16 touches the first cooling roller 13 through the polypropylene resin sheet 11 and the metallic endless belt 15, and further, is provided to hold therein the polypropylene resin sheet 11 which is pressed onto the side of the third cooling roller 16 by the endless belt 15. That is to say, the metallic endless belt 15 and the polypropylene resin sheet 11 touching the endless belt 15 curve to wind onto a part of the circumferential face of the third cooling roller 16.

The aforementioned fourth roller 17 guides the resin sheet 11 so that the polypropylene resin sheet 11 can be touch-rolled through the endless belt 15 to the second cooling roller 14.

Each of the aforementioned cooling rollers 13, 14 and 16 is provided with a temperature adjustment means (not shown), such as a water-cooling type, capable of adjusting the temperature of the surface.

A method for producing the polypropylene resin sheet 11 of the embodiment using the aforementioned producing apparatus will be explained below.

First, the temperature of each of the cooling rollers 13, 14 and 16 is controlled so that the surface temperatures of the metallic endless belt 15 and the third cooling roller 16, which are directly touched to the polypropylene resin sheet 11, can be retained to be less than 50 °C and more than zero.

And, the polypropylene resin sheet 11 extruded from the T-die 12 of the extruder is guided into the area between the first and third cooling rollers 13 and 16 to touch the the endless belt 15, touching with the first cooling roller 13, and the third cooling roller 13 at approximately the same time, so that the resin sheet 11 is cooled to be less than 50°C by being touch-rolled by the first and third cooling rollers 13 and 16. At this time, the elastic member 18 is elastically deformed by being compressed by a pressing force between the first and third cooling rollers 13 and 16, and further the resin sheet 11 is touch-rolled on its face by both of the rollers 13 and 16 in an area of an angle θ_1 from the center of each of the rollers 13 and 16 on which the elastic materials are elastically deformed. The face pressure at this time is 0.1 MPa-20.0MPa.

Continuously, the polypropylene resin sheet 11 is cooled to be less than 50 °C by being touch-rolled onto the third cooling roller 16 by the endless belt 15 having a mirror face. The resin sheet 11, pressed against the cooling roller 16 by the endless belt 15, is held with the cooling roller 16 at an angle θ_2 from the center of the cooling roller 16, so that the resin sheet 11 is touch-rolled on its face with the endless belt 15 and the third cooling roller 16 in the area of the holding angle θ_2 . The face pressure at this time is 0.01 MPa-0.5MPa.

Further, the polypropylene resin sheet 11 is moved to the second cooling roller 14 with the rotation of the endless belt 15 during the state the resin sheet 11 is along the endless belt 15 to lie on top of the other, and the resin sheet 11 is cooled to be less than 50 °C by being touch-rolled to the second cooling roller 14 through the endless belt 15. The resin sheet 11, pressed toward the cooling roller 14 by being guided by the fourth roller 17, is touch-rolled on its face to the endless belt 15 in an area of an angle θ_3 from the center of the cooling roller 14. The face pressure at this time is 0.01 MPa-0.5MPa.

According to the embodiment, by touch-rolling the face and cooling the sheet 11 with both of the rollers 13 and 16 and the endless belt 15 in the area of the angle θ_1 of the first and third rollers 13 and 16 in which the elastic member 18 is elastically deformed, by touch-rolling the face and cooling the sheet 11 with the metallic endless belt 15 and the third cooling roller 16 in the area of the holding angle θ_2 , and by touch-rolling the face and cooling the sheet 11 with the endless belt 15 and the second cooling roller 14 in the area of the angle θ_3 , the high-transparent polypropylene resin sheet 11 can be produced at a high-speed.

[SECOND EMBODIMENT]

A preferred embodiment of a producing method and a producing apparatus of the polypropylene resin sheet 11 relating to the embodiment will be explained with reference to Fig. 2.

First of all, a structure of the producing apparatus of the embodiment will be described.

The producing apparatus is composed of the T-die 12 of an extruder, a first metallic endless belt 23 wound on a first cooling roller 21 and a second cooling roller 2, a second metallic endless belt 26 wound on a third cooling roller 24 and a fourth cooling roller 25, a fifth roller 27 provided adjacent to the fourth cooling roller 25, and two pairs of rollers 28 and 29 provided as an added-pressure means to the endless belts 23 and 26.

The aforementioned first cooling roller 21 is covered with the elastic member 18, such as fluorine-type rubber or the like, on its surface. The elastic member 18 is less than 95 degrees, preferably 60 degrees of the hardness (reference to a type of JIS K6301 A) and more than 3 mm in thickness.

The aforementioned first and second metallic endless belts 23 and 26 are provided to run along side each other to sandwich the polypropylene resin sheet 11 between the first and second rollers 21 and 22 and between the third and

fourth rollers 24 and 25. The endless belts 23 and 26 are each made of stainless or the like and each have a mirror face of less than 0.5 S of the surface roughness.

Each of the aforementioned two pairs of rollers 28 and 29 as the adding-pressure means is provided to face to each other to be opposite of both of the endless belts 23 and 26 in the approximate central position between the first and second rollers 21 and 22 and between the third and fourth rollers 24 and 25. A slight space is provided between the upper and lower rollers 28 and 29. Incidentally, each of the two pairs of rollers 28 and 29 may be located to be away from each other not to oppose each other.

The aforementioned fifth roller 27 guides the resin sheet 11 so that the polypropylene resin sheet 11 is touch-rolled onto the fourth cooling roller 25 through the second endless belt 26.

Each of the aforementioned cooling rollers 21, 22, 24, and 25 is provided with a temperature adjustment means (not shown), such as a water-cooling type, capable of adjusting the temperature of the surface.

Next, a producing method of the polypropylene resin sheet 11 of the embodiment using the aforementioned producing apparatus will be explained.

The temperature of each of the cooling rollers 21, 22, 24 and 25 is controlled so that the surface temperature of the metallic endless belts 23 and 26, which are directly touched to the polypropylene resin sheet 11, can be retained to be less than 50 °C and more than zero.

The polypropylene resin sheet 11 extruded from the T-die 12 of the extruder is guided into the area between the first and second metallic endless belts 23 and 26 to touch the first endless belt 23 touching the first cooling roller 21 and the second metallic endless belt 26 touching the third cooling roller 24 at approximately the same time, so that the polypropylene resin sheet 11 is cooled to be less than 50 °C by being touch-rolled with the first and third cooling rollers 21 and 24. At this time, the elastic member 18 is elastically deformed to be compressed by a pressing force between the first and third cooling rollers 21 and 24, and the resin sheet 11 is touch-rolled on the face by both of the rollers 21 and 24 in an area of an angle θ_1 from the center of each of the rollers 21 and 24 on which each elastic member 18 is elastically deformed. The face pressure at this time is 0.1 MPa-20.0MPa.

Continuously, in a section in which both of the endless belts 23 and 26 run along side each other, the polypropylene resin sheet 11, sandwiched between both endless belts 23 and 26, is touch-rolled with two pairs of rollers 28 and 29 as the adding-pressure means so as to be cooled to be less than 50 °C. The resin sheet 11, sandwiched between both endless belts 23 and 26, is touch-rolled on the face by a pressing force with the pairs of rollers 28 and 29 in a section between the upper and lower rollers 28 to 29. The face pressure at this time is 0.01 MPa-0.5 MPa.

Next, the aforementioned polypropylene resin sheet 11 is moved toward the second and fourth cooling rollers 22 and 25 together with the rotation of both endless belts 23 and 26, and the resin sheet 11 touches the fourth cooling roller 25 through the second endless belt 26 so as to be cooled to be less than 50 °C. The polypropylene resin sheet 11, pressed to the side of the cooling roller 25 by being guided by the fifth roller 27, is touch-rolled on the face to the endless belt 26 in an area of an angle θ_3 from the center of the cooling roller 25. The face pressure at this time is 0.01 MPa-0.5 MPa.

According to the embodiment, by touch-rolling the face and cooling the sheet 11 with both of the rollers 21 and 24 and the endless belts 23 and 26 in the area of the angle θ_1 of the first roller 21, on which the elastic member 18 is elastically deformed, and the third roller 24, by touch-rolling the face and cooling the sheet 11 between the two pairs of rollers 28 and 29 as the adding-pressure means, and by touch-rolling the face and cooling the sheet 11 by the second metallic endless belt 26 and the fourth cooling roller 25 in the area of the angle θ_3 , the high-transparent polypropylene resin sheet 11 can be produced at a high-speed.

[THIRD EMBODIMENT]

A preferred embodiment of a producing method and a producing apparatus of the polypropylene resin sheet 11 relating to the embodiment will be explained with reference to Fig. 3.

First of all, a structure of the producing apparatus of the embodiment will be described.

The producing apparatus has the following different points as compared with the producing apparatus of the second embodiment.

In the producing apparatus, the elastic member 18 is also covered on the surface of the third cooling roller 24.

Further, a roller 31 is used as the adding-pressure means to the endless belts 23 and 26, and in the approximate central position between the third and fourth rollers 24 and 25, the roller 31 is provided to cause both metallic endless belts, 23 and 26 to curve toward the side of the third and fourth rollers 24 and 25. The roller 31 also has a cooling function.

The producing method of the polypropylene resin sheet 11 using the producing apparatus is the same as the second embodiment, but the only different points are the touch-roll on the face by the first and third rollers 21 and 24, and the touch-roll on the face in a section both of the endless belts 23 and 26 run along side each other.

More specifically, when the polypropylene resin sheet 11 extruded from the T-die 12 is guided into the area between the first and second endless belts 23 and 26 to touch the first endless belt 23 and the second endless belt 26 at approx-

imately the same time, both elastic materials 18 are elastically deformed to be compressed by a pressing force between the first and third cooling rollers 21 and 24, so that the resin sheet 11 is touch-rolled on the face by both of the rollers 21 and 24 in the area of the angle $\theta 1$ from the centers of both of the rollers 21 and 24 in which the elastic materials 18 are elastically deformed. The face pressure at this time is 0.1 MPa-20.0 MPa.

When the polypropylene resin sheet 11 is moved from the side of the first and third rollers 21 and 24 to the side of the second and fourth rollers 22 and 25, the polypropylene resin sheet 11 pressed to the side of the aforementioned roller 31 by the second endless belt 26 is held with the roller 31 at the angle $\theta 2$, so that the resin sheet 11, sandwiched between the endless belts 23 and 26 in the area of the holding angle $\theta 2$, is touched on the face to be pressed to the side of the roller 31. The face pressure at this time is 0.01 MPa-.5 MPa.

According to the embodiment, by touch-rolling the face and cooling the sheet 11 with both of the rollers 21 and 24 and the endless belts 23 and 26 in the area of the angle $\theta 1$ of the first and third rollers 21 and 24 on which both elastic materials 18 are elastically deformed, by touch-rolling the face and cooling the sheet 11 with the second endless belt 26 and the roller 31 as the adding-pressure means in the area of the holding angle $\theta 2$, and by touch-rolling the face and cooling the sheet 11 with the second endless belt 26 and the fourth cooling roller 25 in the area of the angle $\theta 3$, the high-transparent polypropylene resin sheet 11 can be produced at a high-speed.

[FOURTH EMBODIMENT]

A preferred embodiment of the producing method and the producing apparatus of the polypropylene resin sheet 11 relating to the embodiment will be explained with reference to Fig. 4.

The producing apparatus of the embodiment has the following different points as compared with the producing apparatus of the first embodiment.

The producing apparatus is structured not to be provided with the fourth roller 17 relating to the first embodiment, but to be, similarly, provided with the first cooling roller 13, covered with the elastic member 18, the second cooling roller 14, the metallic endless belt 15 and the third cooling roller 16.

The producing method of the polypropylene resin sheet 11, using the producing apparatus, is different from the first embodiment in not touching the face to press to the endless belt 15 and not cooling the resin sheet 11 guided by the fourth roller 17 according to the first embodiment.

More specifically, the polypropylene resin sheet 11 extruded from the T-die 12 of the extruder is guided into the area between the first and third rollers 13 and 16 to be touched with the endless belt 15, touched with the first cooling roller 13, and the third cooling roller 16 at approximately the same time, so that the resin sheet 11 is cooled to be less than 50 °C by being touch-rolled with the first and third cooling rollers 13 and 16, and continuously, the polypropylene resin sheet 11 is cooled to be less than 50°C to be touch-rolled to the third cooling roller 16 by the aforementioned endless belt 15 having a mirror face.

According to the embodiment, by touch-rolling the face and cooling the sheet 11 with both of the rollers 13 and 16 and the endless belt 15 in the area of the angle $\theta 1$ of the first and third rollers 13 and 16 on which the elastic member 18 is elastically deformed, and by touch-rolling the face and cooling the sheet 11 with the metallic endless belt 15 and the third cooling roller 16 in the area of the holding angle $\theta 2$, the high-transparent polypropylene resin sheet 11 can be produced at a high-speed.

[FIFTH EMBODIMENT]

A preferred embodiment of the producing method and the producing apparatus of the polypropylene resin sheet 11 relating to the embodiment will be explained with reference to Fig. 5.

The producing apparatus of the embodiment has the following different points as compared with the producing apparatus of the second embodiment.

The producing apparatus is structured not to be provided with the fifth roller 27 relating to the second embodiment, but to be, similarly, provided with the first cooling roller 21, the second cooling roller 22, the first metallic endless belt 23, the third cooling roller 24, the fourth cooling roller 25, the second metallic endless belt 26 and the two pairs of rollers 28 and 29 provided as the adding-pressure means.

The producing method of the polypropylene resin sheet 11, using the producing apparatus, is different from the first embodiment in not touch-rolling the face and cooling the sheet 11 by the second metallic endless belt 26 and the fourth cooling roller 25, relating to the second embodiment.

That is to say, the polypropylene resin sheet 11 extruded from the T-die 12 of the extruder is guided into the area between the first and second metallic endless belts 23 and 26 to touch the first metallic endless belt 23 and the second metallic endless belt 26 at approximately the same time, so that the polypropylene resin sheet 11 is touch-rolled by the first and third cooling rollers 21 and 24 so as to be cooled to be less than 50 °C, and continuously, the polypropylene resin sheet 11 sandwiched between both endless belts 23 and 26 is touch-rolled with the two pairs of rollers 28 and 29 to be cooled to be less than 50 °C.

According to the embodiment, by touch-rolling the face and cooling the resin sheet 11 with both of the rollers 21 and 24 and the endless belts 23 and 26 in the area of the angle $\theta 1$ of the first and third rollers 21 and 24 on which both elastic materials 18 are elastically deformed, and by touch-rolling the face and cooling the sheet 11 in the section between the two pairs of rollers 28 and 29 as the adding-pressure means, the high-transparent polypropylene resin sheet 11 can be produced at a high-speed.

[EXPERIMENT 1]

In the aforementioned first embodiment, the specific condition of the producing apparatus and the producing method will be defined as below.

The diameter of the extruder 90 mm, the width of the T-die 800 mm

Polypropylene resin IDEMITSU POLYPRO F-205S (a trade name, made by Idemitsu Petrochemical Co., Ltd.)

The thickness of the polypropylene resin sheet 0.3 mm

Material of the elastic member silicone rubber, thickness 10 mm, hardness 30 degrees

The sheet pull-down speed 16 m/min.

The temperature of the surface of the roller and the endless belt which touch the sheet 20-23°C

[EXPERIMENT 2]

In the producing method of Experiment 1, only the raw material of the sheet is changed.

More specifically, the used resin is that IDEMITSU POLYPRO F-205S is added with 3,000 ppm of GELALL DH (made by Shin-Nippon Rikagaku Kabushi-Kaisha) as a nucleating agent.

[COMPARISON 1]

In the producing method (see Japanese Patent Application Laid-open No. 6-170919), in which the metallic endless belt is wound between a metal roller and an elastic roller covered with an elastic body on its surface, and the sheet is inserted into the area between the elastic roller and a cooling roller (80 °C) through the metallic endless belt (80 °C), and then the sheet is touch-rolled and cooled by the cooling roller and the belt after being touch-rolled on a part of the face of the cooling roller, the used raw material of resin is the aforementioned IDEMITSU POLYPRO F-205S.

[COMPARISON 2]

A producing method is the same as Comparison 1, but the used raw material for the sheet is Idemitsu Polypro F-205S which is added with the aforementioned GELALL DH.

[COMPARISON 3]

In the producing method (see German Patent 3319279A1, Japanese Utility Model Application Laid-open No. 3-6919), in which the metallic endless belt (30 °C) is wound between a metal roller (30 °C) and an elastic roller covered with an elastic body on its surface, and the sheet is inserted into the area between the elastic roller and a cooling roller through the metallic endless belt, and then the sheet is touch-rolled on a part of the face of the cooling roller, the used raw material of resin is the aforementioned IDEMITSU POLYPRO F-205S.

As to the aforementioned Experiments 1 and 2 and Comparisons 1 to 3, total haze and inner haze of the obtained polypropylene resin sheet is measured, and the surface glossiness of the face touched to the roller and the other face touched to the belt are measured. The results of the measurements will be described in the following Table 1.

Haze is found, with the use of a haze measuring instrument (e.g., NDH-300A, made by Nippon Denshoku Kogyoh Kabushi-Kaisha), from the following formula with a ratio of a total ray transmittance (Tt) signifying the total amount of rays transmitted by illuminating light on the sheet, and a diffused ray transmittance (Td) of diffused rays diffused by the sheet and transmitted. The aforementioned total ray transmittance (Tt) is the sum of a parallel ray transmittance (Tp) transmitted at the same axis as incident light and the diffused ray transmittance (Td).

$$\text{Haze (H)} = Td/Tt \times 100$$

The total haze is found from Tt and Td obtained when light is illuminated on the sheet. The inner haze is measured to eliminate any influence from the outside of the sheet by sandwiching both faces of the sheet with glass plates after silicone oil is coated on both faces of the sheet.

Total haze = inner haze + outer haze

The aforementioned surface glossiness is found from the following, with the use of an automatic colorimetric color-difference meter (e.g., AUD-CH-2 type-45,60, made by Suga Shikenki Kabushiki-Kaisha), from a ratio of reflected pencils ψ os from the surface of the glass of refractive index 1.567 and reflected pencils ψ s measured when light is illuminated on the sheet at the incident angle 60 degrees and the reflected light is received at the same angle 60 degrees.

$$\text{Surface glossiness (Gs)} = (\psi \text{ s} / \psi \text{ os}) \times 100$$

Table 1

	Raw material of sheet	Total haze (%) / inner haze (%)	Surface glossiness (%)	
			roller side	belt side
Experiment 1	polypropylene (PP)	3.4/2.4	148	151
Experiment 2	PP + nucleating agent	2.4/1.3	150	150
Comparison 1	PP	20.6/18.5	137	138
Comparison 2	PP + nucleating agent	7.6/2.6	145	149
Comparison 3	PP	12.4/6.8	147	121

From Table 1, according to Experiment 1, the polypropylene resin sheet 11 is produced by touch-rolling the face and cooling the sheet 11 with both of the rollers 13 and 16 and the metallic endless belt 15 in the area of the angle $\theta 1$ of the first and third rollers 13 and 16 on which the elastic member 18 is elastically deformed, by touch-rolling the face and cooling the sheet 11 with the metallic endless belt 15 and the third cooling roller 16 in the area of the holding angle $\theta 2$, and by touch-rolling the face and cooling the sheet 11 with the endless belt 15 and the second cooling roller 14 in the area of the angle $\theta 3$, with the result that it is understood that the polypropylene resin sheet 11, having low total haze and inner haze but high-transparency, can be obtained even when being produced at a high-speed. Incidentally, it is seen that the surface glossiness is high on both faces of the roller and belt sides.

According to Experiment 2, the obtained polypropylene resin sheet 11 has similar character to Experiment 1, but the haze is slightly further improved than Experiment 1. Therefore, according to the present invention, by adding nucleating agent into the raw material of resin, the transparency of the sheet can be further improved.

On the other hand, according to Comparison 1, sufficient face-pressure is added in the starting point of immediate cooling, so that the fine effect of the immediate cooling is hardly obtained, with the result that the transparency of the obtained sheet is low and also the surface glossiness is low.

According to Comparison 2, by adding the nucleating agent into the raw material of resin, the improvement of the transparency and the surface glossiness of the obtained sheet appears somewhat as compared with Comparison 1.

According to Comparison 3, since a section of face-pressure between the sheet and the metallic endless belt is short, it is understood that the transparency of the obtained sheet is insufficient and the surface glossiness of the face of the belt side of the sheet is low.

Claims

1. A producing method of a thermoplastic resin sheet, using a producing apparatus in which a metallic endless belt having a mirror face on the surface is provided to be wound on and between a first cooling roller, covered with an elastic member on the surface, and a second cooling roller, and a third cooling roller, having a mirror face on the surface and touching the first cooling roller through a molten thermoplastic resin sheet and the metallic endless belt, is provided to hold the molten thermoplastic resin sheet pressed against the metallic endless belt, comprising the steps of:

guiding the molten thermoplastic resin sheet into the area between the first and third cooling rollers to touch the metallic endless belt, touching the first cooling roller, and the third cooling roller at approximately the same time, while the temperature of the metallic endless belt, directly touching the molten thermoplastic resin sheet,

and the third cooling roller is retained to be less than 50 °C and more than zero;

touch-rolling the face and cooling the molten thermoplastic resin sheet by the first and third cooling rollers while the elastic member is elastically deformed by a pressing force between the first and third cooling rollers; and cooling, subsequently, the molten thermoplastic resin sheet by touch-rolling the molten thermoplastic resin sheet on the face against the third cooling roller by the metallic endless belt to cool.

2. The producing method of the thermoplastic resin sheet according to Claim 1:
 - wherein when the molten thermoplastic resin sheet is touch-rolled on the face with the elastic deformation of the elastic member, the face pressure is defined as 0.1 MPa-20.0 MPa; and
 - wherein when the molten thermoplastic resin sheet is touch-rolled on the face without the elastic deformation of the elastic member, the face pressure is defined as 0.01 MPa-0.5 MPa.
3. A producing method of the thermoplastic resin sheet, using a producing apparatus in which a first metallic endless belt, having a mirror face, wound on and between a first cooling roller, covered with an elastic member on the surface, and a second cooling roller and a second metallic endless belt, having a mirror face, wound on and between a third cooling roller and a fourth cooling roller are provided to run along side each other to sandwich a molten thermoplastic resin sheet, and an added-pressure means for both metallic endless belts is provided in a section where both metallic endless belts run along side each other to sandwich the molten thermoplastic resin sheet, comprising the steps of:
 - guiding the molten thermoplastic resin sheet into the area between the first and second metallic endless belts to touch the first endless belt, touching the first cooling roller, and the second metallic endless belt, touching the third cooling roller, at approximately the same time while the temperature of the metallic endless belt directly touching the molten thermoplastic resin sheet is retained to be less than 50°C and more than zero;
 - touch-rolling the face and cooling the molten thermoplastic resin sheet by the first and third cooling rollers while the elastic member is elastically deformed by a pressing force between the first and third cooling rollers; and
 - cooling, subsequently, the molten thermoplastic resin sheet by touch-rolling the molten thermoplastic resin sheet on the face by the added-pressure means in a section where both metallic endless belts run along side each other.
4. The producing method of the thermoplastic resin sheet according to Claim 3, wherein the third cooling roller is covered with the elastic member on the surface of the third cooling roller.
5. The producing method of the thermoplastic resin sheet according to Claim 3, wherein the added-pressure means for both metallic endless belts is at least a pair of rollers located to sandwich both metallic endless belts.
6. The producing method of the thermoplastic resin sheet according to Claim 3, wherein the added-pressure means for both metallic endless belts is a roller located to cause both metallic endless belts to curve between the first and second roller or between the third and fourth rollers.
7. The producing method of the thermoplastic resin sheet according to Claim 3:
 - wherein when the molten thermoplastic resin sheet is touch-rolled on the face with the elastic deformation of the elastic member, the face pressure is defined as 0.1 MPa-20.0 MPa; and
 - wherein when the molten thermoplastic resin sheet is touch-rolled on the face without the elastic deformation of the elastic member, the face pressure is defined as 0.01 MPa-0.5 MPa.
8. A producing apparatus of a thermoplastic resin sheet, comprising:
 - a metallic endless belt having a mirror face, which is wound on and between a first cooling roller, covered with an elastic member on the surface of said metallic endless belt, and a second cooling roller; and
 - a third cooling roller having a mirror face and touching said first cooling roller through a molten thermoplastic resin sheet and said metallic endless belt, which is provided to hold said molten thermoplastic resin sheet pressed by said metallic endless belt.
9. The producing apparatus of a thermoplastic resin sheet according to Claim 8, wherein said elastic member is less than 60 degrees of the hardness (reference to a type of JIS K6301 A).
10. A producing apparatus of a thermoplastic resin sheet, comprising:

a first metallic endless belt having a mirror face, which is wound on and between a first cooling roller covered with an elastic member on the surface of said first metallic endless belt;

a second metallic endless belt having a mirror face, which is wound on and between a third cooling roller and a fourth cooling roller, said first metallic endless belt and said second metallic endless belt being provided to run along side each other to sandwich a molten thermoplastic resin sheet; and

an added-pressure means for adding pressure to said both metallic endless belts in a section where said both metallic endless belts run along side each other to sandwich said molten thermoplastic resin sheet.

11. The producing apparatus of the thermoplastic resin sheet according to Claim 10, wherein said third cooling roller is covered with said elastic member on the surface of said third cooling roller.

12. The producing apparatus of the thermoplastic resin sheet according to Claim 10, wherein said added-pressure means for adding pressure to said both metallic endless belts is at least a pair of rollers located to sandwich said both metallic endless belts.

13. The producing apparatus of the thermoplastic resin sheet according to Claim 10, wherein said added-pressure means for adding pressure to said both metallic endless belts is a roller located to cause said both metallic endless belts to curve between said first and second rollers or between said third and fourth rollers.

14. The producing apparatus of the thermoplastic resin sheet according to Claim 10, wherein said elastic member is less than 95 degrees of the hardness (reference to a type of JIS K6301 A).

15. The producing apparatus of the thermoplastic resin sheet according to Claim 14, wherein said elastic member is less than 60 degrees of the hardness (reference to a type of JIS K6301 A).

FIG. 1

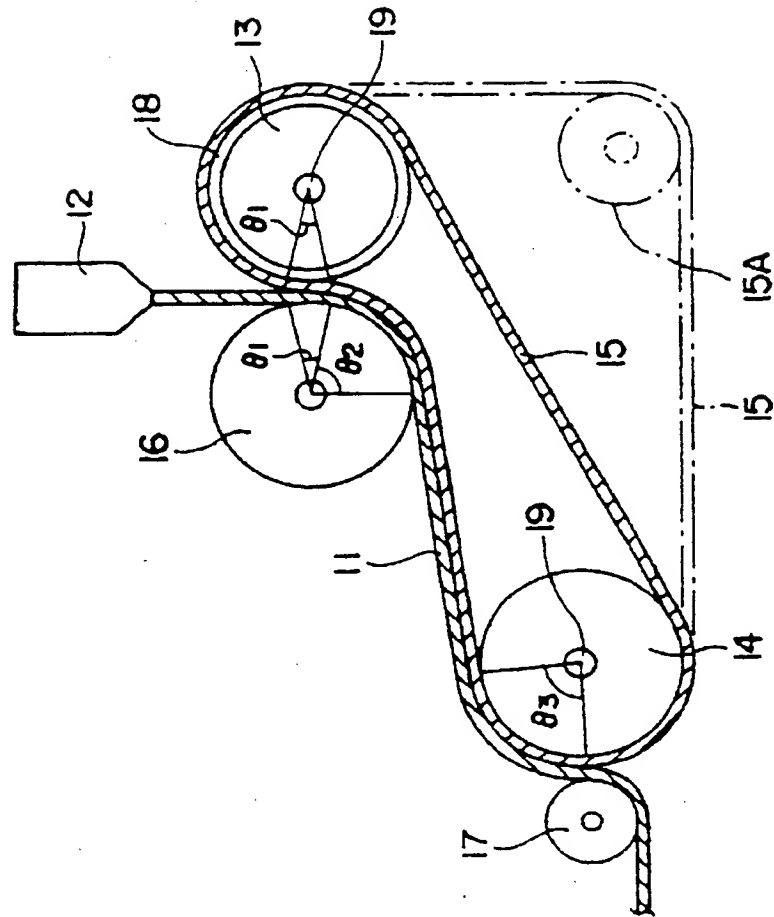


FIG. 2

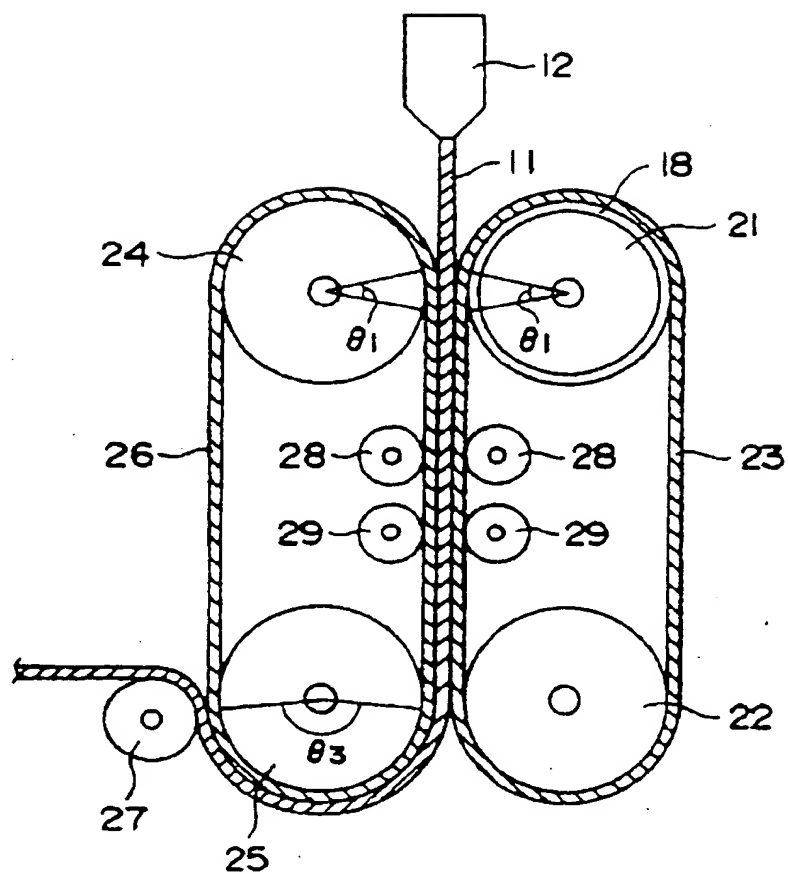


FIG. 3

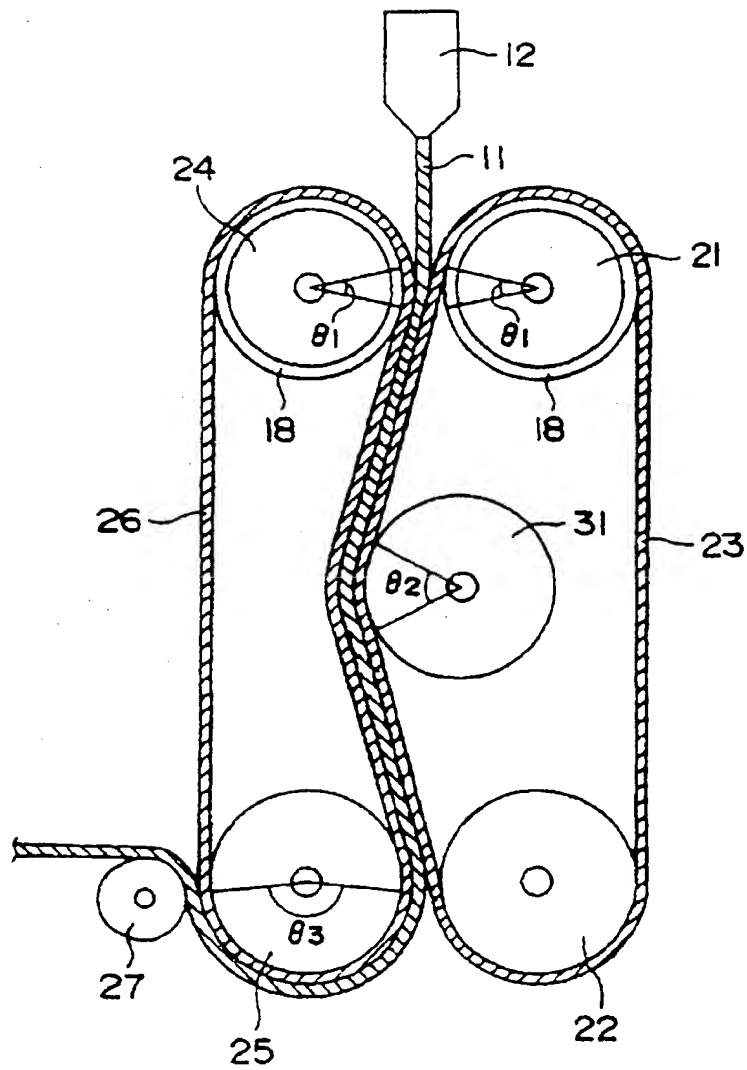


FIG.4

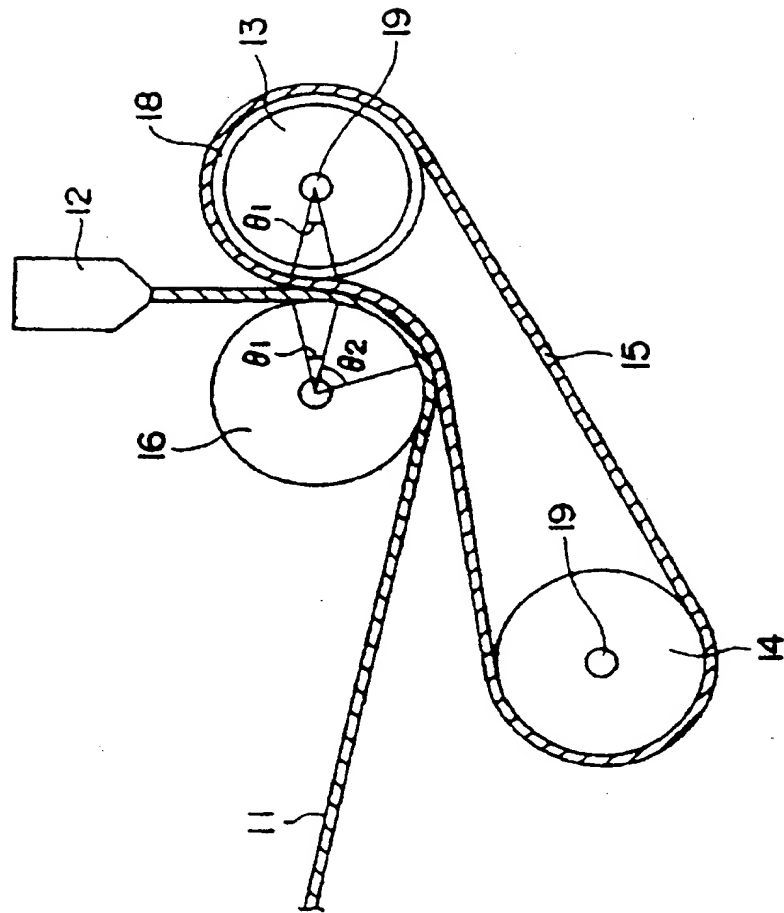


FIG. 5

